



HX-40 RAM



SANS CÂBLAGE

Faible consommation

CARACTÉRISTIQUES

Longue autonomie des piles

Le boîtier des batteries permet d'inclure jusqu'à 3 batteries en parallèle, donnant ainsi une grande autonomie.



Les Batteries peuvent être remplacées indépendamment.

Dummy battery

*Twist and cut off the portion that fits the applicable battery type.

Mise en service et maintenance très simple



PROTECTION INDUSTRIELLE & TERTIAIRE

 Centrales nucléaires
 Stations d'épuration d'eau
 Plateformes logistiques

Industrie chimique
 Industrie électrique
 Protection de chantiers...



OPTEX SECURITY FRANCE


475, rue Monique et Mario Piani
 69480 AMBÉRIEUX D'AZERGUES
 Téléphone +33 437 555 050
 Fax +33 437 555 059

www.optex-security.com




Détecteur extérieur pour applications radio HX-40 RAM

DIMENSIONS

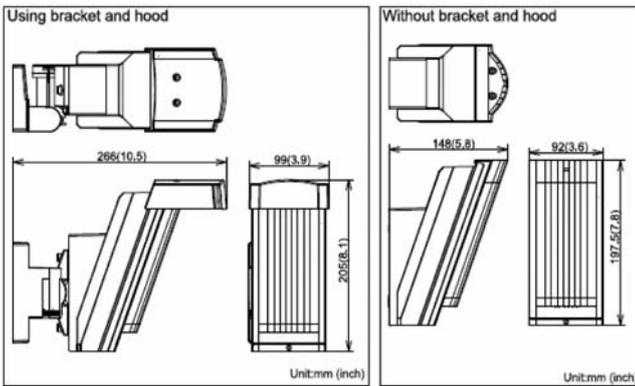


Dimensions pour l'émetteur (taille réelle)

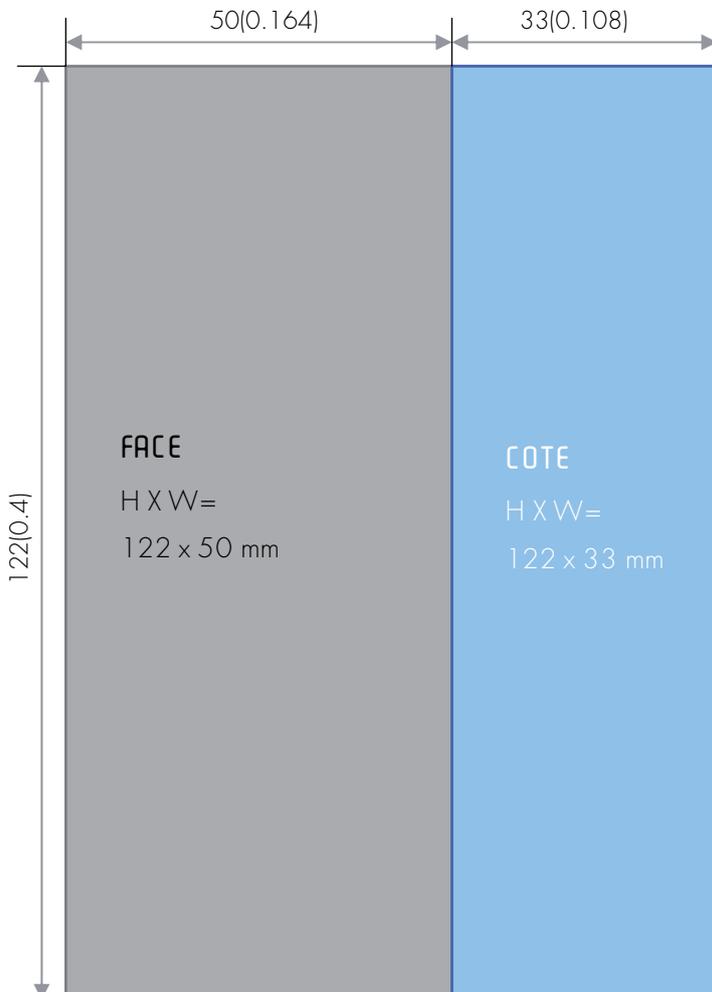

PORTÉES

Champ de Détection

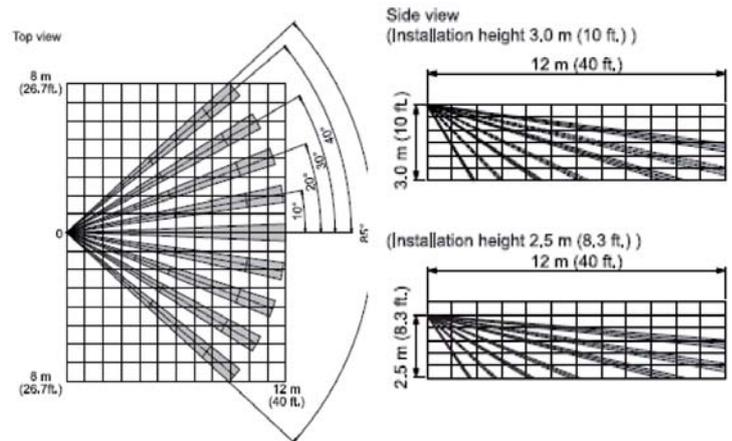

SPÉCIFICATIONS

Model	HX-40RAM
Detection method	Passive infrared
PIR Coverage	12 m (40 ft.) 85° wide / 94 zones
Distance limit	4 m, 5.5 m, 9 m, 12 m (13 ft, 18 ft, 30 ft, 40 ft.)
Detectable speed	0.3 – 1.5 m/s (1 – 5 ft/s)
Sensitivity	2.0°C (3.6°F) at 0.6 m/s
Power input	3 – 7.2VDC Lithium Battery (CR123A×3, CR2×3, 1/2AA×3, 1/2AA×6)
Operating Voltage	2.5 – 9VDC
Current draw	30µA(standby) / 4 mA (max) at 3VDC
Alarm period	2.0 ± 1 sec
Warm-up period	Approx. 90 sec(LED blinks)
Alarm output	Form C -Solid State Switch- 10VDC 0.01A max
Trouble output	N.C./N.O. Selectable -Solid State Switch- 10VDC 0.01A max
Tamper output	Form C, 28V DC, 0.1A max. changes when cover removed.
LED indicator	Disable: During normal operation. Enable: During WALK TEST or LED SW on. Red: Warm-up, Alarm, Trouble, Low battery
RF Interference	No alarm 10 V/m
Operating temperature	-20 – +60°C (-4 – +140°F)
Environment humidity	95% max
Weatherproof	IP55
Mounting	Wall (Outdoor, Indoor)
Mounting height	2.5 - 3.0 m (8.3 - 10 ft.)
Bracket adjust angle	Vertical: ± 20° Horizon: ± 95°
Weight	600 g (21.2 oz)
Accessories	Bracket, Hood, Area masking seal, Screw kit (3×10-2, 4×20-4) Velcro tape×2, Alarm cable, Battery lead×2, Dummy battery kit

* Specifications and design are subject to change without prior notice.